

# IMPAKTOR 250 e-pu

(for domestic and commercial waste, waste wood, e-waste etc.)



## DIMENSIONS

Version	Stationary
Shredding Unit	
Length (mm)	3.300
Width (mm)	2.300
Height (mm)	3.200
Control Unit	
Length (mm)	2.600
Width (mm)	1.600
Height (mm)	2.700
Total weight (kg)	approx 15.000

## DRIVE

Engine	Electric
Power (kW)	160
Gearbox	Bonfiglioli


## SHREDDING UNIT

Hopper volume (m <sup>3</sup> )	2,25
Shaft length (mm)	1.500
Shaft diameter (mm)	680
Weight (kg / cassette)	3.800
Rotation speed (rpm)	11 – 35



### Separate drive and control unit

Due to distance placement of the shredding and control unit (max 8 meters in between) there is significant less vibration to the control system. Additionally, dust and dirt are reduced.

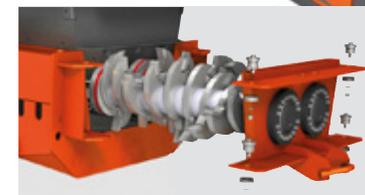

### Quick change system for tool shafts

Easy installation and quick removal of shafts, for easier maintenance, preparation and changing of shaft type, which increases more productivity.



### Mechanically adjustable side combs

The side combs can be opened or closed, depending on material and customer requirements and decreases the output size or increases the throughput rate.

\*Rest of the world (country-specific requirements);  
We reserve the right to make technical changes, misprints and errors. Status: March 2021